
Buzzer for 3300 Series Digital Clock (V1.1)

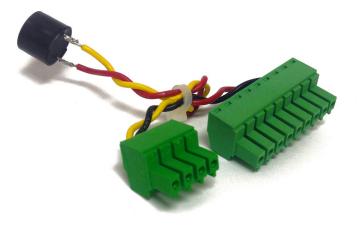

🤅 sapling

Synchronized Clock Systems

Features:

- When a countdown initiated by the Elapsed Timer Control Panel reaches zero (00:00:00), the buzzer produces an audible tone to signal the completion of the countdown
- Wired internally to Sapling's 3300 Series Digital Clock
- Works in conjunction with Sapling's Elapsed Timer Control Panel
- Buzzer powered by Sapling's 3300 Series Digital Clock
- The clock can be programmed to sound the buzzer for a duration of 1 to 60 seconds

Specifications:

Dimensions:	Operating Voltage:
Diameter: 12mm (1.2cm) +/- 0.2mm (0.02cm)	4.0 - 7.0 VDC**
Height: 10mm (1cm) +/- 0.2mm (0.02cm)	Rated Voltage:
Operating Temperature:	5 VDC
2°F to 122°F	Tone/Pulse Rate:
0°C to 50°C	Constant
Storage Temperature:	Power:
5°F to -103°F	Powered by Sapling 3300 Series Digital Clock
-15°C to -75°C	Color:
Decibel Level:	Black
85 db/min*	

2300Hz +/- 400Hz

Ordering Information:

Oscillation Frequency:

A-BUZZ-3300-1 *Measured in an open air environment **(Buzzer is powered by the digital clock)