

1. CHOOSE YOUR DIGITS & COLOR

NUMBER OF DIGITS



4 digit

6 digit

SIZE OF DIGITS



2.5 inch digits

4.0 inch digits

LED DISPLAY



red led display

amber led display

white led display

green led display



2. CHOOSE YOUR MOUNTING

SURFACE/WALL MOUNT



surface/wall mount
flush mount

DOUBLE MOUNT



double mount wall mount
standard pole available
double mount ceiling mount
standard or short pole available


FLAG MOUNT




flag mount ceiling mount
standard or short pole available
flag mount wall mount
standard pole available

DIGITAL DIMENSIONS


Surface Mount

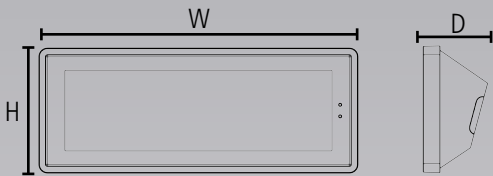


Flush Mount

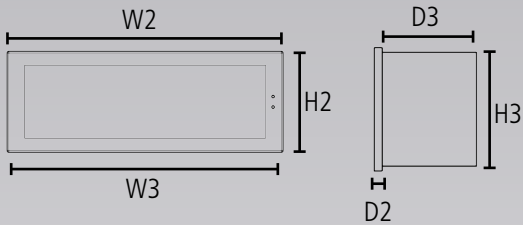

Wall Double Mount

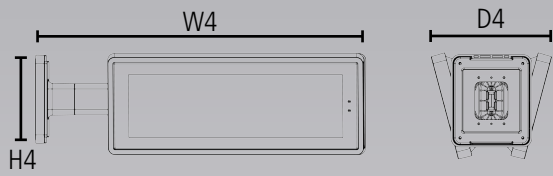

Ceiling Double Mount†

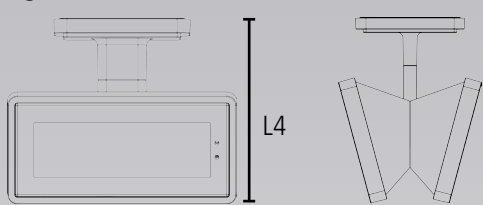

†Available with standard or shortened pole length

	4 Digits 2.5" (6.35cm)	4 Digits 4.0" (10.16cm)	6 Digits 2.5" (6.35cm)	6 Digits 4.0" (10.16cm)
Surface Mount:	W = 11.06" (28.09cm) H = 5.38" (13.67cm) D = 4.06" (10.31cm)	W = 14.13" (35.89cm) H = 7.56" (19.20cm) D = 4.38" (11.61cm)	W = 14.44" (36.68cm) H = 5.38" (13.67cm) D = 4.06" (10.31cm)	W = 19.25" (48.90cm) H = 7.56" (19.20cm) D = 4.38" (11.61cm)
Flush Mount Outside Wall:	W2 = 10.25" (26.03cm) H2 = 4.53" (11.51cm) D2 = 0.281" (0.71 cm)	W2 = 13.22" (33.58cm) H2 = 6.72" (17.07cm) D2 = 0.281" (0.71 cm)	W2 = 13.63" (34.62cm) H2 = 4.53" (11.51cm) D2 = 0.281" (0.71 cm)	W2 = 18.38" (46.69cm) H2 = 6.72" (17.07cm) D2 = 0.281" (0.71 cm)
Flush Mount Housing:	W3 = 9.63" (24.46cm) H3 = 3.81" (9.68 cm) D3 = 3.00" (7.62 cm)	W3 = 12.63" (32.08cm) H3 = 6.28" (15.95cm) D3 = 3.00" (7.62 cm)	W3 = 13.13" (33.35cm) H3 = 4.03" (10.24cm) D3 = 3.00" (7.62 cm)	W3 = 17.75" (45.09cm) H3 = 6.09" (15.47cm) D3 = 3.00" (7.62 cm)
Double Mount:	H4 = 6.56" (16.67cm) D4 = 8.09" (20.54cm)	H4 = 6.56" (16.67cm) D4 = 8.63" (21.92cm)	H4 = 6.56" (16.67cm) D4 = 8.09" (20.54cm)	H4 = 6.56" (16.67cm) D4 = 8.63" (21.92cm)
Overall Width at positions on standard pole: (SAB-1BD-00S-0)	W4 = 18.95" (48.13cm) = 17.30" (43.94cm) = 15.66" (39.78cm)	W4 = 20.47" (51.99cm) = 18.83" (47.83cm) = 17.18" (43.63cm)	W4 = 20.63" (52.40cm) = 18.98" (48.21cm) = 17.34" (44.04cm)	W4 = 24.69" (62.71cm) = 23.05" (58.55cm) = 21.41" (54.38cm)
Overall Length for standard pole*: (SAB-1BD-00S-0)	L4 = 14.75" (37.47cm)	L4 = 15.75" (40.01cm)	L4 = 14.75" (37.47cm)	L4 = 15.75" (40.01cm)
Overall Length for shortened pole**: (SAB-1BD-01S-0)	L4 = 8.68" (22.03cm)	L4 = 10.13" (25.72cm)	L4 = 8.68" (22.03cm)	L4 = 10.13" (25.72cm)
Visibility (Max Brightness):	150 feet (45.72 meters)	250 feet (76.20 meters)	150 feet (45.72 meters)	250 feet (76.20 meters)

***Standard** pole refers to part number SAB-1BD-00S-0
****Shortened** pole (ceiling mount only) refers to part number SAB-1BD-01S-0

DON'T FORGET TO CHECK OUT

SAPLING ANALOG CLOCKS



Sapling offers a variety of analog clock options to choose from. Don't forget to check out our Analog Clock Options brochure.

SAPLING TIME ZONE CLOCKS



Sapling offers time zone clocks featuring analog clocks, digital clocks, or a mix of both. Please be sure to check out our Time Zone Clock Options brochure.

SAPLING SYSTEMS



Sapling offers multiple systems to meet any facility's needs. Please be sure to check out our System Options brochure.

3. CHOOSE ACCESSORIES

TEMPERATURE SENSOR

TIME



TEMPERATURE



celsius or fahrenheit
display option

ELAPSED TIMER CONTROL PANEL



multiple button options

BUZZER



audible buzzer for end
of countdown



DIGITAL CLOCK OPTIONS

			SBP/SBW/SBD/SBL/SBT SERIES		
			3100 Family	3200 Family	3300 Family
CLOCK SYSTEM		IP/PoE (SBP)	•	•	•
		Wi-Fi (SBW)	•	•	•
		Wired (SBD)	•	•	•
		Wireless (SBL)	•	•	•
		TalkBack (SBT)	•	•	•
		Zone Clock	•	•	•
DIGIT SIZE		2.5"	•	•	•
		4.0"	•	•	•
DIGITS		4 Digits	•	•	•
		6 Digits	•	•	•
DISPLAY COLOR		Red	•	•	•
		White	•	•	•
		Green	•	•	•
		Amber	•	•	•
CASE		Surface Mount	•	•	•
		Flush Mount*	•	•	•
DOUBLE/FLAG MOUNT		SAB-1BD-00S-0** <i>standard length</i>	•	•	•
		SAB-1BD-01S-0** <i>short length</i>	•	•	•
MISC.		UL Listed	•	•	•
		Temperature Sensor Interface†		•	•
		Elapsed Timer Interface†		•	•
		Buzzer Accessory Interface†			•
		Brightness Schedule	Δ	•	•
		Relay Output/Input			•
		Nurse Call Interface			•
		Time/Date Alternation	•‡	•	•

* Flush Mount Housing not available for Wireless (SBL), TalkBack Wireless (SBT), or Wi-Fi (SBW) systems

** SAB-1BD-00S-0 is available for ceiling or wall mount, SAB-1BD-01S-0 is available for ceiling mount only

† The clock has the ability to interface with the optional accessory which is sold separately

‡ US date format only, unless IP (SBP) or Wi-Fi (SBW) clock

Δ IP (SBP) Clocks only!

OFFICE: 670 Louis Drive, Warminster
Pennsylvania 18974, USA

PHONE: +1.215.322.6063

FAX: +1.215.322.8498

WEBSITE: www.sapling-inc.com

EMAIL: info@sapling-inc.com

*SAPLING - a global leader in engineering & manufacturing
quality synchronized clock systems since 1993*



SAPLING DIGITAL CLOCK OPTIONS

