

Sapling Prayer Clock - V1.2

Features:

- High-quality, professional synchronized prayer clock automatically adjusted for local & prayer times (after initial setup)
- Available with either 5 or 6 prayer displays
- Digital displays are available at 2.5" (6.35cm) or 4.0" (10.16cm) digit height
- Digital displays are available in Red (standard), Green, White, or Amber
- Sleek, stylish design in robust housing
- Wall mounted
- Easy to set and install
- Analog square clock presents local time, while digital displays present prayer times

Highlights:

- Network-Based Interface Available in either Wi-Fi or hardwired network cable options allowing the clock to interface with the facility's internet
- Customized Printed Label For the preferred city (or location) name of the square analog clock
- **Square Analog Clock Built-in Web Interface** To easily configure the time zone offset, allowing the square clock to display local time depending on its geographical location (city)
- **Digital Prayer Displays' Built-in Web Interface** To easily configure various settings, such as displaying the prayers in either a 12-hour or 24-hour format, setting the displays' brightness, etc.
- Various Dial and Hand Styles The square analog clock is available in a variety of different dial and hand style options
- **Synchronized Clock System** The Prayer Clock may also interface with a facility-wide Sapling synchronized clock system



^{*}specification sheets may change without prior notice



Sapling Prayer Clock - V1.2

Specifications:

Case Frame Material:

Aluminum

Case Frame Color:

Black

Mounting:

Wall Mounted

Brightness for Digital Displays:

Low, Medium, High, OFF

Product Weight:

For 5 display Prayer Clocks with 2.5" displays: 45 lbs.

(20.4 kg)

For 6 display Prayer Clocks with 2.5" displays: 55 lbs.

(24.9 kg)

For 5 display Prayer Clocks with 4.0" displays: 55 lbs.

(24.9 kg)

For 6 display Prayer Clocks with 4.0" displays: 65 lbs.

(29.5 kg)

Shipping Weight:

For 5 display Prayer Clocks with 2.5" displays: 55 lbs.

(24.9 kg)

For 6 display Prayer Clocks with 2.5" displays: 65 lbs.

(29.5 kg)

For 5 display Prayer Clocks with 4.0" displays: 65 lbs.

(29.5 kg)

For 6 display Prayer Clocks with 4.0" displays: 75 lbs.

(34.0 kg)

Voltage Input:

100 - 230 VAC

Average VAC Current Consumption:

1.2 A @ 115 VAC

1.0 A @ 230 VAC

Data Communication:

For Wi-Fi based prayer clocks - over Wi-Fi

802.11 b/g/n (2.4 GHz only)


For hard-wired network based prayer clocks - RJ45


interface



Synchronized Clock Systems

Sapling Prayer Clock - V1.3





	Prayer Clock with 5 prayers:	Prayer Clock with 6 prayers:
4 digits 2.5" (6.35 cm) displays	A - B: 46.8 in. (118.9 cm.) C - D: 6.1 in. (15.3 cm.) E - F: 25.21 in. (64.0 cm.)	A - B: 51.13 in. (129.9 cm.) C - D: 6.1 in. (15.3 cm.) E - F: 25.21 in. (64.0 cm.)
4 digits 4.0" (10.16 cm) displays	A - B: 62.36 in. (158.4 cm.) C - D: 6.1 in. (15.3 cm.) E - F: 36.94 in. (93.8 cm.)	A - B: 69.34 in. (176.1 cm.) C - D: 6.1 in. (15.3 cm.) E - F: 36.94 in. (93.8 cm.)

Square Clock Hand Options:





Specialty Hands 1



Specialty Hands 2




Specialty Hands 3



Sapling Prayer Clock - V1.3

Square Clock Dial Options:

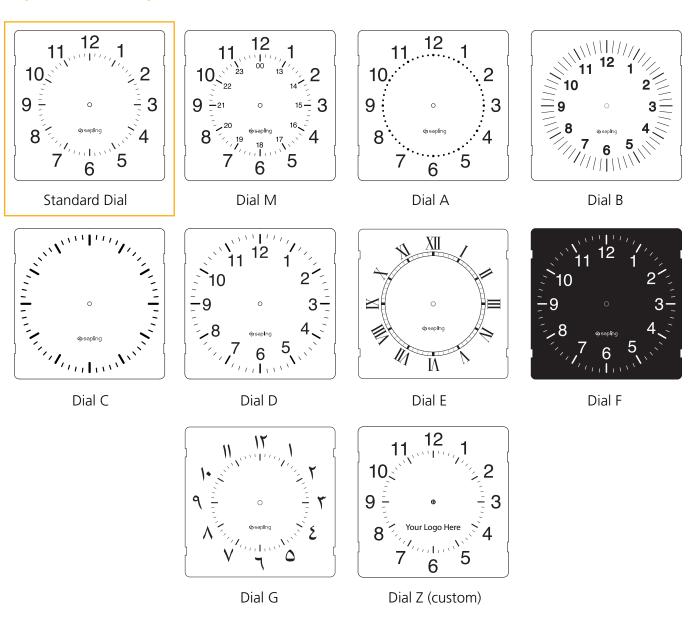

Ordering Information:

