

Double Mount Housing for Round Clocks (V4.2)

Features:

- Connects two analog clocks for a double-sided time display
- Same mount can be used for a wall or ceiling installation
- Choose from 3 adjustable positions on the pole
- Reinforced ABS adapters and aluminum pole
- UL, cUL listed

Dimensions:

- Black Color
- Mounting Ring Diameter (does not include clock)
 - 12" (30.4 cm) Mounting Ring:

Standard = 12.4" (31.5 cm)

SlimLine = 12.5" (31.8 cm)


• 16" (40.6 cm) Mounting Ring:

Standard = 16.3" (41.4 cm)

SlimLine = 16.4" (41.9 cm)

- Base Width = 5.7" (14.5 cm)
- Base Height = 6.6" (16.7 cm)



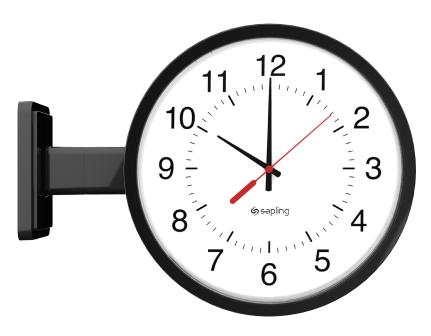


Same adapter is used for either a wall mount or ceiling mount




Double Mount Housing for Round Clocks (V4.2)

Design:









Mounting Ring for SlimLine and Aluminum Clocks

Aluminum Clocks | Mounting Ring for Standard ABS & Metal Clocks

Ordering Information:

SlimLine and Aluminum
Double Mount Housing: SAH-1XD-XXR-0

Į I	
Color:	Clock Size:
B: Black	12: 12"
C: Custom	16: 16"

Standard ABS & Metal
Double Mount Housing: SAB-4XD-XXR-0M

	Ĺ		
Color:		Clock Size	e:
B: Blac	k	12: 12"	
C: Cus	tom	16: 16"	

Note: Purchasing double mounted round analog clocks will require two clocks using the clock part number and one double mount housing using the part number above.

Examples:

SAB-4BD-12R-0M Sapling Double Mount Housing for 12" Metal Clocks

SAH-1BD-16R-0 Sapling Double Mount Housing for 16" SlimLine or Aluminum Clocks

Specification sheets may change without prior notice