

Features:

- Available in 9" (22.8cm), and 12" (30.4 cm) dial sizes
- Offered in a stylish ABS case
- Multiple power options
 - Offered in 24/110VAC, 230VAC, and battery-powered models
- Provided with mounting hardware for easy installation
- Hour, minute, and second hands
- Quick correction for time change (max. 5 minutes)
- Microprocessor based movement
- Internal Antenna
- Side molded, polycarbonate crystal
- FCC Compliant per FCC part 15 Section 15,247

Highlights:

- Each clock acts as a repeater for the time data signal
- Energy efficient
- 900 MHz frequency hopping technology to ensure signal reliability
 - No FCC License Required
- Receives and repeats the time data
 - Once every minute if locally powered
 - Once every two hours in standard mode, or once every four hours in economy mode if battery powered
- Built–in self-diagnostic mode:
 - Signal reception strength
 - Clock movement testing
 - Battery level if battery-powered
- Custom Color Cases available (minimum order quantity 25)
- Designed and Produced by Sapling Inc. in Pennsylvania, United States of America





Specifications:

Case Material:

Acrylonitrite Butadiene Styrene (ABS).

Case Color:

Standard black or white back case, metallic gray front rim (custom colors available)

Dial Face:

12 or 24 (military) hour standard

Specialty dials avaliable

Dial Material:

Durable polystyrene

Crystal Material:

Shatter-proof, side-molded, transparent polycarbonate

Voltage Input:

Two 1.5V "D" Cell Alkaline Batteries (Battery model)

11 - 28 VAC 50/60 Hz (24V model)

85 - 130 VAC 50/60 Hz (110V model)

180 - 260 VAC 50/60 Hz (230V model)

Average Current Consumption:

Battery - 5 years (standard mode)

8 years (economy mode)

35 mA @ 24VAC

25 mA @ 110VAC

15 mA @ 230VAC

Hand tolerance:

Minute hand: +/- 1/4 minute

Second hand: +/- 1/2 second

Temperature range:

Operating: 32°F - 113°F (0°C - 45°C)

Shelf: 5°F - 167°F (-15°C - 75°C)

Operating frequencies:

915-928 MHz while frequency-hopping

Transceiver parameters:

Transmitter power output: 8 dbm


Receiver sensitivity: -103 dbm

Compliance:


UL and cUL listed, FCC part 15 Section 15,247

Ordering Information:

SAL Series Wireless Square Clock: SAL-4XS-XXS-X-XX

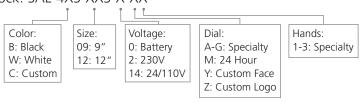

Double Mount Pole: SAB-XXD-XXS-0



- *Standard length black poles will always be metal (SAB-1BD-00S-0)
- *Short length black poles will always be ABS (SAB-4BD-01S-0)
- *Standard length white poles will always be ABS (SAB-4WD-00S-0)


Note: Purchasing double mounted round analog clocks will require two clocks using the clock part number and one double mount housing using the part number above.


Examples:


SAL-4WS-09S-0: Sapling Analog, Wireless 900 MHz, 9" Square, Battery-Operated, Surface Wall Mount, White Case with Metallic Gray Rim Sapling Analog, Wireless 900 MHz, 12" Square, 24V/110VAC, Surface Wall Mount, Mineral Black Case with Metallic Gray Rim Specification sheets may change without prior notice



Sapling Square Analog Clock Dimensions

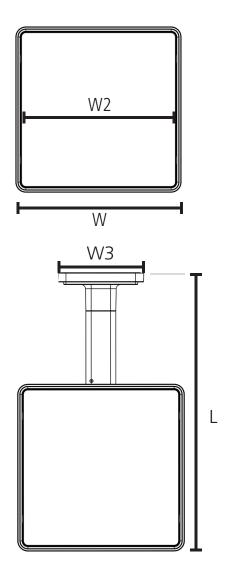



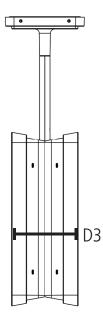


	9" Square	12" Square
Clock Size:	W = 9.79" (24.9cm) W2 = 8.97" (22.8cm) D = 2.44" (6.2cm) D2 = 1.34" (3.4cm)	W = 12.76" (32.4cm) W2 = 11.94" (30.3cm) D = 2.44" (6.2cm) D2 = 1.34" (3.4cm)
Shipping Weight:	3.0lbs (1.81kg)	4.0lbs (1.81kg)
Double/Dual Mount Dimensions:	W3 = 6.56" (16.7cm) D3 = 4.93" (12.5cm)	W3 = 6.56" (16.7cm) D3 = 4.93" (12.5cm)
Adjustable Pole Height for standard pole*:	L3 = 18.32" (46.5cm)	L = 21.12" (53.6cm) L = 19.35" (49.1cm)
Shortened Pole Height:	= 12 38" (31 4cm)	L = 15.50" (39.3cm)

- *Standard pole refers to part number SAB-1GD-00S-0
- ****Shortened** pole (ceiling mount only) refers to part number SAB-1GD-01S-0



Hand & Dial Options





Specialty Hands 1




Specialty Hands 2



Specialty Hands 3





















Dial C

Dial D

Dial E

Dial F





Specialty Hands 1-3 & Specialty Dials A-Z are offered at an additional cost.

For more information please contact your Sapling Representative.

Dial Z