


## SALG Series Wireless 2.4GHz Round Clock (V5.9)

### Features:

- Available in 9", 12", and 16" dial sizes
- Offered in a SlimLine ABS case
  - Optional Cherry Wood finish or Brushed Aluminum finish
- Multiple power options
  - Offered in 24/110VAC, 230VAC, and battery-powered models
- Provided with mounting hardware for easy installation
- Hour, minute, and second hands
- Quick correction for time change (max. 5 minutes)
- Microprocessor based movement
- Internal Antenna
- Side molded, polycarbonate crystal
- FCC Compliant per FCC part 15 Section 15.247

### Highlights:

- Each clock acts as a repeater for the time data signal
- Energy efficient
- 2.4 GHz frequency hopping technology to ensure signal reliability
  - No FCC License Required
- Receives and repeats the time data
  - Once every minute if locally powered
  - Once every two hours in standard mode, or once every four hours in economy mode if battery powered
- Built-in self-diagnostic mode:
  - Signal reception strength
  - Clock movement testing
  - Battery level if battery-powered
- Custom Color Cases available (minimum order quantity 25)
- Designed and Produced by Sapling Inc. in Pennsylvania, United States of America

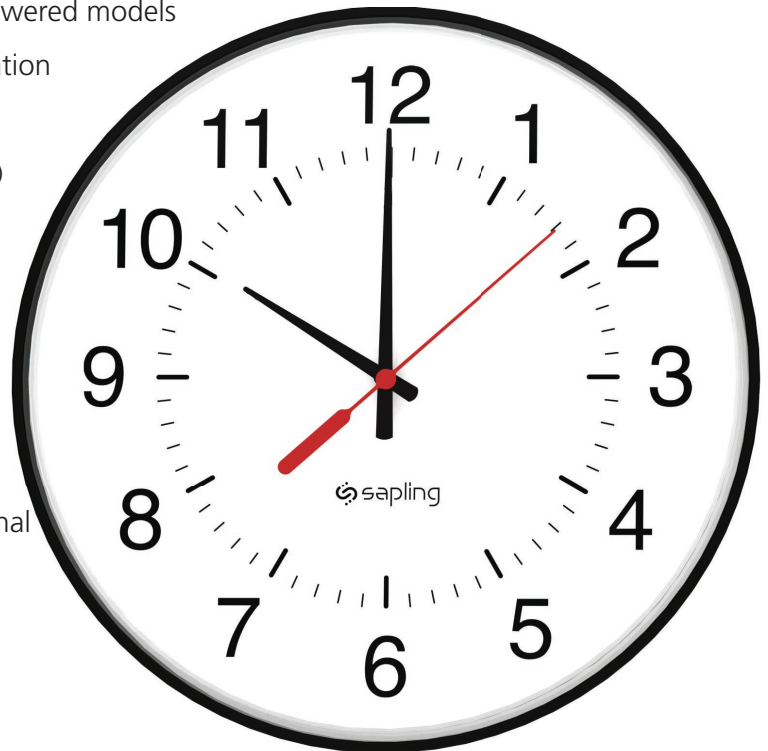

## SALG Series Wireless 2.4GHz Round Clock (V5.9)

### Specifications:

#### Case Material:

Acrylonitrile Butadiene Styrene (ABS).  
Cherry wood finish or brushed aluminum finish for the SlimLine ABS case is also available.

#### Case Color:

Standard black finish (custom colors available)

#### Dial Face:

12 or 24 (military) hour standard  
Specialty dials available

#### Dial Material:

Durable polystyrene

#### Crystal Material:

Shatter-proof, side-molded, transparent polycarbonate

#### Voltage Input:

Two 1.5V "D" Cell Alkaline Batteries (Battery model)  
11 - 28 VDC/VAC 50/60 Hz (24V model)  
85 - 130 VAC 50/60 Hz (110V model)  
180 - 260 VAC 50/60 Hz (230V model)

#### Average Current Consumption:

Battery - 5 years (standard mode)  
8 years (economy mode)  
35 mA @ 24VDC/VAC  
25 mA @ 110VAC  
15 mA @ 230VAC

#### Hand tolerance:

Minute hand: +/- 1/4 minute  
Second hand: +/- 1/2 second

#### Temperature range:

Operating: 32°F - 113°F (0°C - 45°C)  
Shelf: 5°F - 167°F (-15°C - 75°C)

#### Operating frequencies:

2.4 GHz while frequency-hopping

#### Transceiver parameters:


Transmitter power output: 8 dbm  
Receiver sensitivity: -103 dbm

#### Compliance:


UL and cUL listed, FCC part 15 Section 15,247

### Ordering Information:

SALG Series Wireless Round Clock: SALG-XXS-XXR-X-XX

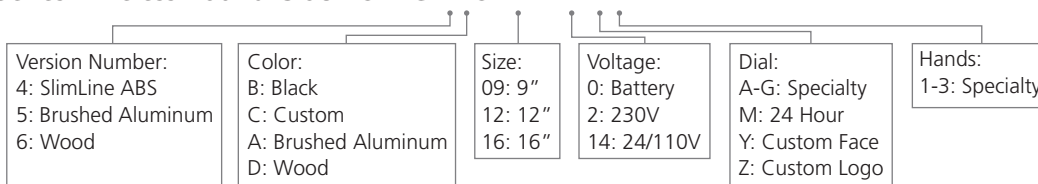

Double Mount Housing: SAH-1XD-XXR-0




**Note:** Purchasing double mounted round analog clocks will require two clocks using the clock part number and one double mount housing using the part number above.

#### Examples:

SALG-5AS-09R-0 Sapling Analog, Wireless SlimLine, 2.4 GHz, 9" Round, Battery-Operated, Surface Wall Mount, Brushed Aluminum Case  
SALG-6DS-16R-14 Sapling Analog, Wireless SlimLine, 2.4 GHz, 16" Round, 24/110 VAC, Surface Wall Mount, Solid Cherry Wood Frame

# SALG Series Wireless 2.4 GHz Round Clock (V5.9)

## Sapling Round Analog Clock Dimensions

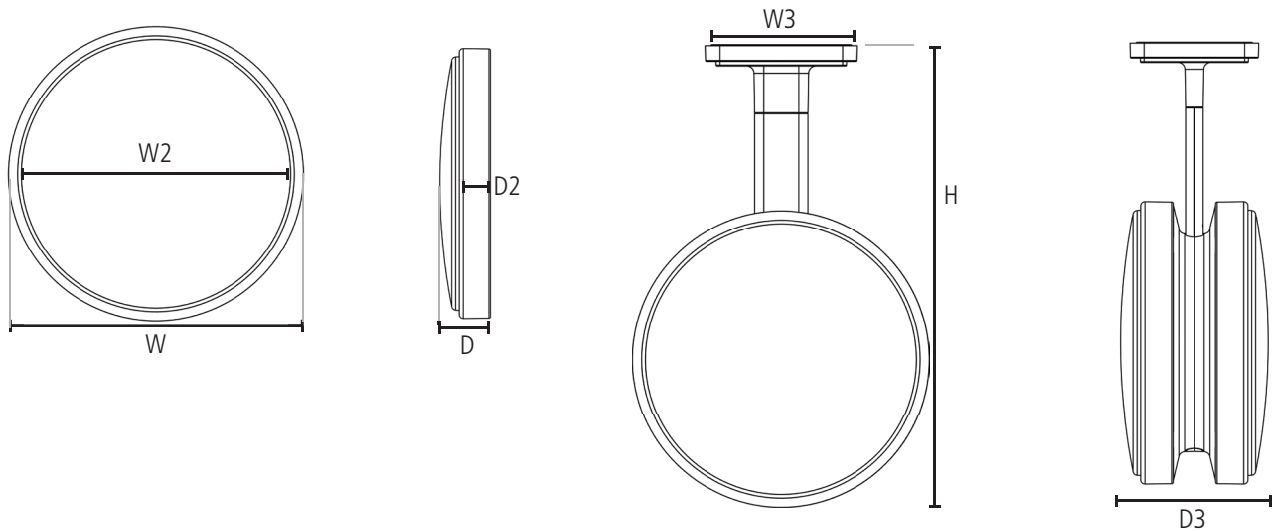

### SLIMLINE ABS

Clock Size:	<b>9" SlimLine</b>	<b>12" SlimLine</b>	<b>16" SlimLine</b>
	W = 9.8" (24.8cm)	W = 12.9" (32.7cm)	W = 16.7" (42.3cm)
	W2 = 9.5" (24.2cm)	W2 = 12.6" (32.0cm)	W2 = 16.3" (41.5cm)
	D = 2.4" (6.2cm)	D = 2.4" (6.2cm)	D = 2.5" (6.4cm)
	D2 = 1.7" (4.2cm)	D2 = 1.7" (4.3cm)	D2 = 1.7" (4.4cm)
Shipping Weight:	2 lbs (0.9 kg)	2 lbs (0.9 kg)	4 lbs (1.8 kg)
Double/Dual Mount Dimensions:	Not Applicable	W3 = 6.6" (16.7cm) D3 = 6.4" (16.2cm)	W3 = 6.6" (16.7cm) D3 = 6.4" (16.3cm)
Adjustable Pole Height:	Not Applicable	H = 19.7" (50.2cm) = 18.1" (46.1cm) = 16.5" (41.9cm)	H = 21.7" (55.3cm) = 20.1" (51.2cm) = 18.5" (47.0cm)

### ALUMINUM

### WOODEN

Clock Size:	<b>9" Aluminum</b>	<b>12" Aluminum</b>	<b>16" Aluminum</b>	<b>9" Wood</b>	<b>12" Wood</b>	<b>16" Wood</b>
	W = 10.7" (27.1cm)	W = 13.8" (35.0cm)	W = 17.8" (45.1cm)	W = 11.6" (29.5cm)	W = 13.3" (33.8cm)	W = 19.6" (49.9cm)
	W2 = 9.5" (24.2cm)	W2 = 12.6" (32.0cm)	W2 = 16.3" (41.5cm)	W2 = 9.5" (24.2cm)	W2 = 12.6" (32.0cm)	W2 = 16.5" (41.5cm)
	D = 2.4" (6.2cm)	D = 2.4" (6.2cm)	D = 2.4" (6.4cm)	D* = 2.4" (6.2cm)	D* = 2.4" (6.2cm)	D* = 2.4" (6.4cm)
	D2 = 1.7" (4.2cm)	D2 = 1.7" (4.4cm)	D2 = 1.7" (4.4cm)	D2* = 2.7" (6.8cm)	D2* = 2.7" (6.8cm)	D2* = 2.7" (6.8cm)
Shipping Weight:	2 lbs (0.9kg)	3 lbs (1.4 kg)	4 lbs (1.8 kg)	3 lbs (kg)	4 lbs (1.8 kg)	6 lbs (2.7 kg)
Double/Dual Mount Dimensions:	Not Applicable	W3 = 6.6" (16.7cm) D3 = 6.4" (16.2cm)	W3 = 6.6" (16.7cm) D3 = 6.4" (16.3cm)	Not Applicable	Not Applicable	Not Applicable
Adjustable Pole Height:	Not Applicable	H = 20.2" (51.5cm) = 18.6" (47.3cm) = 17.0" (43.2cm)	H = 22.3" (56.6cm) = 20.6" (52.4cm) = 19.0" (48.2cm)	Not Applicable	Not Applicable	Not Applicable


**\*NOTE:** For wood clocks, the rim (D2) protrudes further from the wall than the crystal (D).

## SALG Series Wireless 2.4GHz Round Clock (V5.9)


### Hand & Dial Options




Standard Hands



Specialty Hands 1




Specialty Hands 2




Specialty Hands 3




Standard Dial




Dial M  
(Military 24 Hours)




Dial A

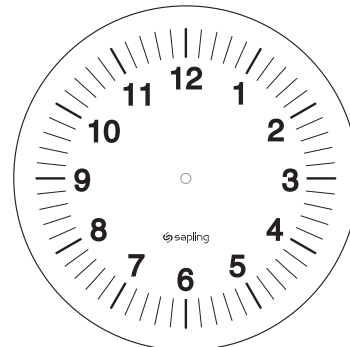


Dial B

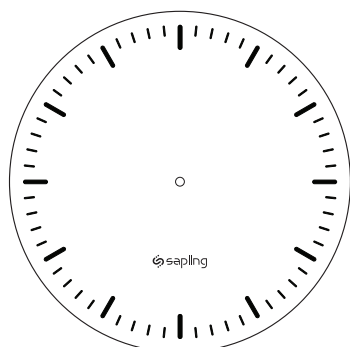


Dial C




Dial D




Dial E

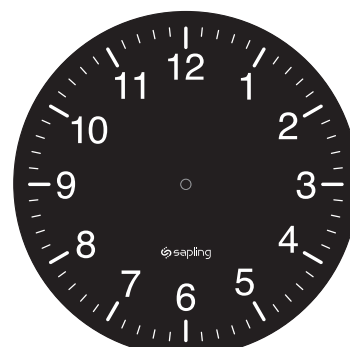

Dial F

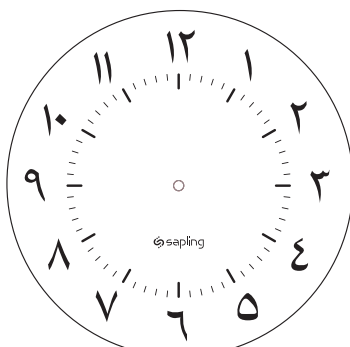

Dial G



Dial Z

Specialty Hands 1-3 & Specialty  
Dials A-Z are offered at an  
additional cost.

For more information please contact  
your Sapling Representative.

## SALG Series Wireless 2.4GHz Round Clock (V5.9)

### Clock Case Options



Standard SlimLine  
ABS Case



Brushed Aluminum Finish



Solid Wood Case Cherry Finish

