SATG Series Wireless TalkBack 2.4Hz Square Clock (V5.9)

Features:

- Available in 9" (22.8cm), and 12" (30.4 cm) dial sizes
- Offered in a stylish ABS case
- Multiple power options
 - Offered in 24/110VAC, 230VAC, and battery-powered models
- Provided with mounting hardware for easy installation
- Hour, minute, and second hands
- Quick correction for time change (max. 5 minutes)
- Microprocessor based movement
- Internal Antenna
- Side molded, polycarbonate crystal
- FCC Compliant per FCC part 15 Section 15,247

Highlights:

- Reports to the Master Clock using Sapling's TalkBack protocol:
 - Mechanical Status
 - Signal Strength
 - Battery voltage (when applicable)
- Each clock acts as a repeater for the time data signal
- Energy efficient
- 2.4 GHz frequency hopping technology to ensure signal reliability
 - No FCC License Required
- Receives and repeats the time data
 - Once every minute if locally powered
 - Once every two hours if battery powered
- Built-in self-diagnostic mode:
 - Signal reception strength
 - Clock movement testing
 - Battery level if battery-powered
- Custom Color Cases available (minimum order quantity 25)
- Designed and Produced by Sapling Inc. in Pennsylvania, United States of America



🤉 sapling

Synchronized Clock Systems

Specification sheets may change without prior notice



SATG Series Wireless TalkBack 2.4GHz Square Clock (V5.9)

Specifications: Case Material:

Acrylonitrite Butadiene Styrene (ABS).

Case Color:

Standard black or white back case, metallic gray front rim (custom colors available)

Dial Face:

12 or 24 (military) hour standard

Specialty dials avaliable

Dial Material:

Durable polystyrene

Crystal Material:

Shatter-proof, side-molded, transparent polycarbonate

Voltage Input:

Two 1.5V "D" Cell Alkaline Batteries (Battery model)

11 - 28 VAC 50/60 Hz (24V model)

85 - 130 VAC 50/60 Hz (110V model)

180 - 260 VAC 50/60 Hz (230V model)


Average Current Consumption:

Battery - 5 years 35 mA @ 24VAC 25 mA @ 110VAC 15 mA @ 230VAC Hand tolerance: Minute hand: +/- 1/4 minute Second hand: +/- 1/2 second Temperature range: Operating: 32°F - 113°F (0°C - 45°C) Shelf: 5°F - 167°F (-15°C - 75°C) **Operating frequencies:** 2.4 GHz while frequency-hopping **Transceiver parameters:** Transmitter power output: 8 dbm Receiver sensitivity: -103 dbm **Compliance:**

UL and cUL listed, FCC part 15 Section 15,247

Ordering Information:

SAT Series Wireless Square Clock: SATG-4XS-XXS-X-XX



Double Mount Pole: SAB-XXD-XXS-0



*Standard length black poles will always be metal (SAB-1BD-00S-0) *Short length black poles will always be ABS (SAB-4BD-01S-0) *Standard length white poles will always be ABS (SAB-4WD-00S-0)

Note: Purchasing double mounted round analog clocks will require two clocks using the clock part number and one double mount housing using the part number above.

Examples:

SATG-4WS-09S-0: Sapling Analog, Wireless TalkBack 2.4 GHz, 9" Square, Battery-Operated, Surface Wall Mount, White Case with Metallic Gray Rim SATG-4BS-12S-14: Sapling Analog, Wireless TalkBack 2.4 GHz, 12" Square, 24V/110VAC, Surface Wall Mount, Mineral Black Case with Metallic Gray Rim


Specification sheets may change without prior notice





SATG Series Wireless TalkBack 2.4GHz Square Clock (V5.9)

Sapling Square Analog Clock Dimensions

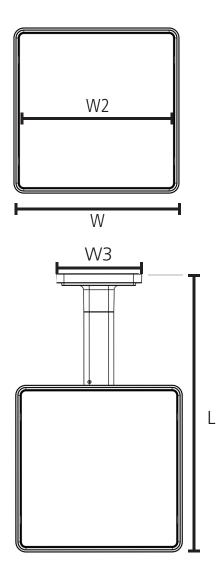


	9" Square	12" Square
Clock Size:		
Shipping Weight:	3.0lbs (1.81kg)	4.0lbs (1.81kg)
Double/Dual Mount Dimensions:	W3 = 6.56" (16.7cm) D3 = 4.93" (12.5cm)	W3 = 6.56" (16.7cm) D3 = 4.93" (12.5cm)
Adjustable Pole Height for standard pole*:	L3 = 18.32" (46.5cm)	L = 21.12" (53.6cm) L = 19.35" (49.1cm)
Shortened Pole Height:	L = 12.38" (31.4cm)	L = 15.50" (39.3cm)



***Standard** pole refers to part number SAB-1GD-00S-0

****Shortened** pole (ceiling mount only) refers to part number SAB-1GD-01S-0

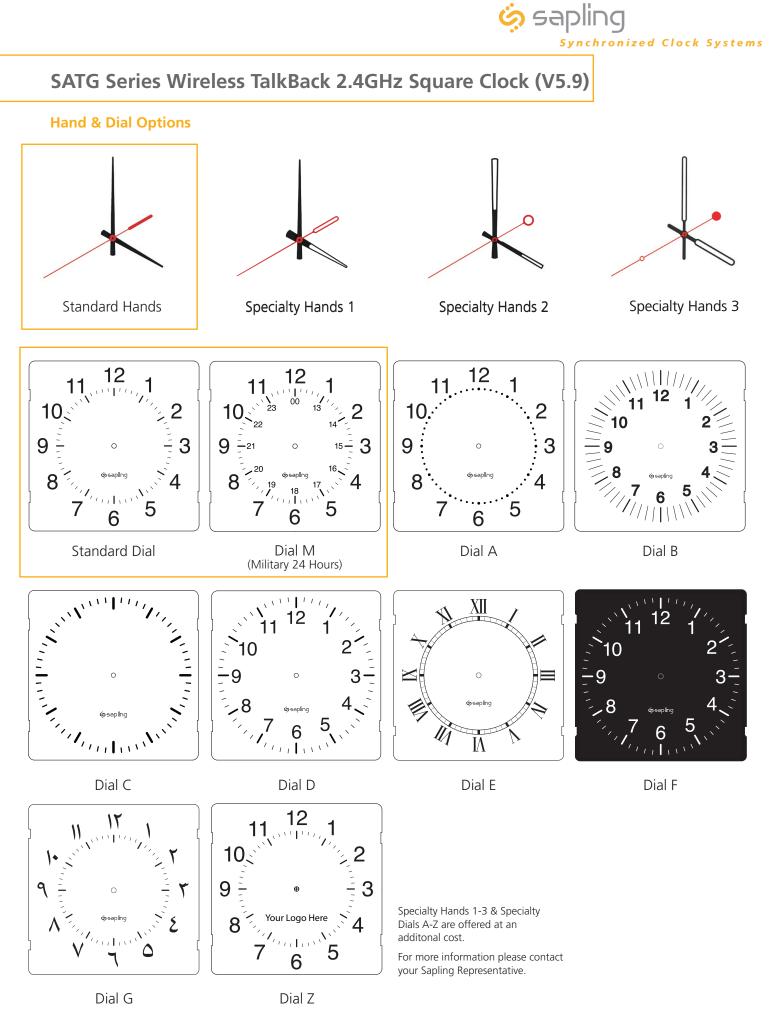

The Sapling Company, Inc. • 670 Louis Drive Warminster, PA 18974 USA • P: (+1) 215.322.6063 • F: (+1) 215.322.8498 • W: www.sapling-inc.com