


#### **Features:**

- Available in 9" (22.8cm), 12" (30.4 cm), and 16"(40.6 cm) dial sizes
- Offered in a Standard or SlimLine ABS case
  - Optional Cherry Wood finish or Brushed Aluminium finish
- Multiple power options
  - Offered in 24VAC/VDC, 110VAC, 230VAC, & battery-powered models
- Provided with mounting hardware for easy installation
- Hour, minute, and second hands
- Quick correction for time change (max. 5 minutes)
- Internal Antenna
- Microprocessor based movement
- Side molded, polycarbonate crystal
- FCC Compliant per FCC part 15 Section 15

#### **Highlights:**

- Built-in web interface each clock has a built in web interface allowing the user to set, control, and monitor the Wi-Fi clock
  - Settings include: Network settings, NTP server selection, UTC/GMT offset selection (-5 default), automatic Daylight Saving Time adjustments (US default), and much more!
- Receives time data from one of five pre-programmed third party NTP servers (user changeable) for added reliability and redundancy. Alternatively, it can be set to receive the time data from an inhouse NTP Server or from any Sapling Master Clock model.
- Built-in self-diagnostics for:
  - NTP Synchronization Timeouts
  - Power resets
  - Hand position errors and corrections
- Direct-connect mode allows users to configure the clock wirelessly before connecting it to a Wireless Network.
- Adjustable synchronization rate to reduce electricity costs.
  - Battery: 12 hours default. 2/4/8/24 hours adjustable.
  - Locally powered: 5 minutes default. 0.25/0.5/1/4/12/24 hours adjustable.
- Custom Color Cases available (minimum quantity 25)
- Designed and Produced by Sapling Inc. in Pennsylvania, United States of America

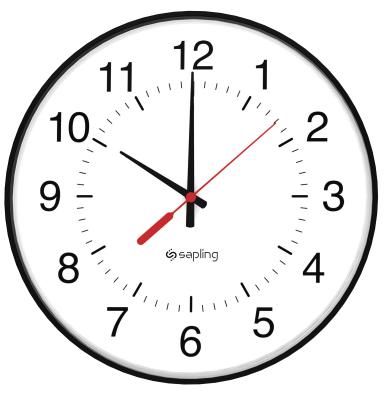

#### **Specifications:**

#### Case Material:

Acrylonitirite Butadiene Styrene (ABS)

Cherry wood finish or brushed aluminum finish for the SlimLine ABS case are also available

#### Case Color:

Standard black finish (custom colors available)

#### **Dial Face:**

12 or 24 (military) hour standard

Specialty dials avaliable

#### **Dial Material:**

Polyvinyl Chloride (PVC)

#### **Crystal Material:**

Shatter-proof, side-molded, transparent polycarbonate

#### Voltage Input:

Two 1.5V "D" Cell Alkaline Batteries (Battery model)

7 - 28 VDC/VAC 50/60 Hz (24V model)

85 - 130 VAC 50/60 Hz (110V model)

180 - 260 VAC 50/60 Hz (230V model)

#### **Average Current Consumption:**

Battery - 5 - 7 years (affected by frequency of updates)

40 mA @ 24VDC/VAC

10 mA @ 110VAC Maximum

5 mA @ 230VAC Maximum

#### **Compatible Wi-Fi Communication Protocols:**

802.11 b/g/n (2.4GHz only)

#### **Compatible Security Protocols:**

WEP, WPA/WPA2

#### Hand tolerance:

Minute hand: +/- 1/4 minute

Second hand: +/- 1/2 second

#### Temperature range:

Operating: 14°F - 122°F (-10°C - 50°C)

Shelf: -4°F - 131°F (-20°C - 55°C)


#### Compliance:

UL, cUL listed. FCC part 15 Section 15


# C UL US

### **Ordering Information:**

SAW Series Wi-Fi Round Clock: SAW-XXS-XXR-X-XX



Double Mount Housing: SAH-1XD-XXR-0



**Note:** Purchasing double mounted round analog clocks will require two clocks using the clock part number and one double mount housing using the part number above.

\*Note: SlimLine and Aluminum clocks use the SlimLine Adapter.

#### Examples:


SAW-5AS-09R-0 Sapling Analog, Wi-Fi SlimLine, 9" Round, Battery-Operated, Surface Wall Mount, Brushed Aluminum Case SAW-6DS-16R-14 Sapling Analog, Wi-Fi SlimLine, 16" Round, 24/110 VAC, Surface Wall Mount, Solid Cherry Wood Frame





## Synchronized Clock Systems


# SAW Series Wi-Fi Round Clock (V1.5)

## **Sapling Round Analog Clock Dimensions**





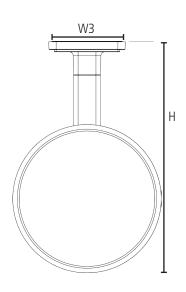



#### **SLIMLINE ABS**

Clock Size:	9" SlimLine	12" SlimLine	16" SlimLine
	W = 9.8" (24.8cm) W2 = 9.5" (24.2cm) D = 2.4" (6.2cm) D2 = 1.7" (4.2cm)	W = 12.9" (32.7cm) W2 = 12.6" (32.0cm) D = 2.4" (6.2cm) D2 = 1.7" (4.3cm)	W = 16.7" (42.3cm) W2 = 16.3" (41.5cm) D = 2.5" (6.4cm) D2 = 1.7" (4.4cm)
Shipping Weight:	2 lbs (0.9 kg)	2 lbs (0.9 kg)	4 lbs (1.8 kg)
Double/Dual Mount Dimensions:	Not Applicable	W3 = 6.6" (16.7cm) D3 = 6.4" (16.2cm)	W3 = 6.6" (16.7cm) D3 = 6.4" (16.3cm)
Adjustable Pole Height:	Not Applicable	H = 19.7" (50.2cm) = 18.1" (46.1cm) = 16.5" (41.9cm)	H = 21.7" (55.3cm) = 20.1" (51.2cm) = 18.5" (47.0cm)

		ALUMINUM		WOODEN		
Clock Size:	9" Aluminum	12" Aluminum	16" Aluminum	9" Wood	12" Wood	16" Wood
	,	,	W = 17.8" (45.1cm) W2 = 16.3" (41.5cm) D = 2.4" (6.4cm) D2 = 1.7" (4.4cm)	W2 = 9.5" (24.2cm) $D^* = 2.4"$ (6.2cm)	,	W2 = 16.5" (41.5cm) D* = 2.4" (6.4cm)
Shipping Weight:	2 lbs (0.9kg)	3 lbs (1.4 kg)	4 lbs (1.8 kg)	3 lbs (kg)	4 lbs (1.8 kg)	6 lbs (2.7 kg)
Double/Dual Mount Dimensions:	Not Applicable	,	W3 = 6.6" (16.7cm) D3 = 6.4" (16.3cm)	Not Applicable	Not Applicable	Not Applicable
Adjustable Pole Height:	Not Applicable	H = 20.2" (51.5cm) = 18.6" (47.3cm) = 17.0" (43.2cm)	= 20.6" (52.4cm)	Not Applicable	Not Applicable	Not Applicable


**<sup>\*</sup>NOTE:** For wood clocks, the rim (D2) protrudes further from the wall than the crystal (D).





#### **Hand & Dial Options**

Dial G

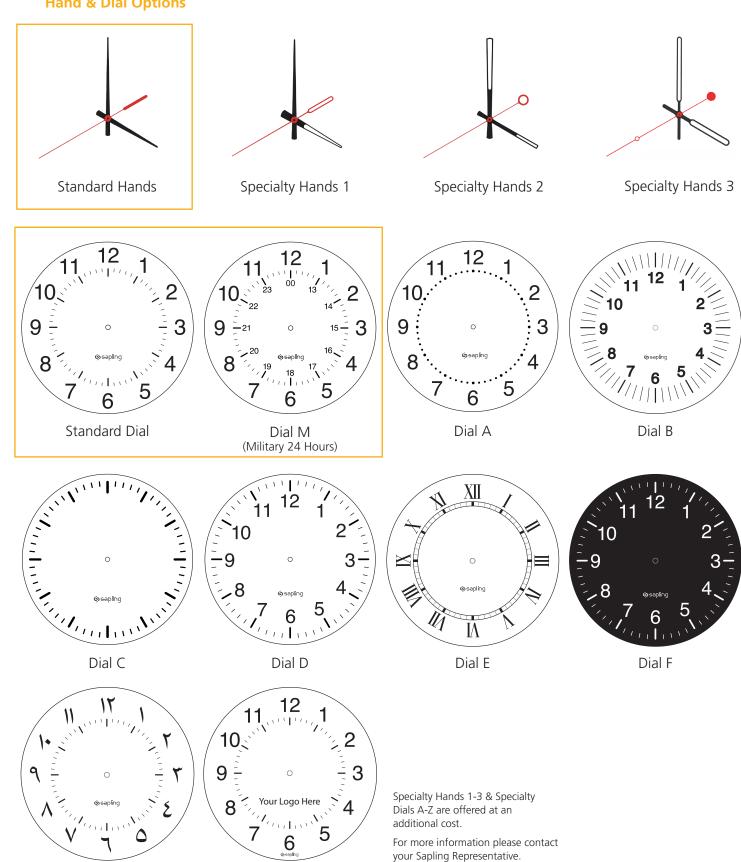

Dial Z





## **Clock Case Options**



Standard SlimLine ABS Case



Brushed Aluminum Finish Solid Wood Case Cherry Flnish

