synchronized Clock Systems

# SAW Series Wi-Fi Square Clock (V2.7)

#### **Features:**

- Available in 9" (22.8cm), and 12" (30.4 cm) dial sizes
- Offered in a stylish ABS case
- Multiple power options
  - Offered in 24VAC/VDC, 110VAC, 230VAC, & battery-powered models
- Provided with mounting hardware for easy installation
- Hour, minute, and second hands
- Quick correction for time change (max. 5 minutes)
- Microprocessor based movement
- Internal Antenna
- Side molded, polycarbonate crystal
- FCC Compliant per FCC part 15 Section 15

#### **Highlights:**

- Built-in web interface each clock has a built in web interface allowing the user to set, control, and monitor the Wi-Fi clock
  - Settings include: Network settings, NTP server selection, UTC/GMT offset selection (-5 default), automatic Daylight Saving Time adjustments (US default), and much more!
- Receives time data from one of five pre-programmed third party NTP servers (user changeable) for added reliability and redundancy. Alternatively, it can be set to receive the time data from an in-house NTP Server or from any Sapling Master Clock model.
- Built-in self-diagnostics for:
  - NTP Synchronization Timeouts
  - Power resets
  - Hand position errors and corrections
- Direct-connect mode allows users to configure the clock wirelessly before connecting it to a Wireless Network.
- Adjustable synchronization rate to reduce electricity costs.
  - Battery: 12 hours default. 2/4/8/12/24 hours adjustable.
  - Locally powered: 5 minutes default. 0.25/0.5/1/4/12/24 hours adjustable.
- Custom Color Cases available (minimum quantity 25)
- Designed and Produced by Sapling Inc. in Pennsylvania, United States of America



## SAW Series Wi-Fi Square Clock (V2.7)

#### Specifications:

Case Material:

Acrylonitrite Butadiene Styrene (ABS)

#### Case Color:

Standard black or white back case, metallic gray front rim (custom colors available)

#### Dial Face:

12 or 24 (military) hour standard

Specialty dials avaliable

### **Dial Material:**

Polyvinyl Chloride (PVC)

#### **Crystal Material:**

Shatter-proof, side-molded, transparent polycarbonate

#### Voltage Input:

Two 1.5V "D" Cell Alkaline Batteries (Battery model)

7 - 28 VAC 50/60 Hz (24V model)

85 - 130 VAC 50/60 Hz (110V model)

180 - 260 VAC 50/60 Hz (230V model)

#### **Average Current Consumption:**

🤄 sapling

Battery - 5 - 7 years (affected by frequency of updates) 40 mA @ 24VDC/VAC 10 mA @ 110VAC 5 mA @ 230VAC **Compatible Wi-Fi Communication Protocols:** 802.11 b/g/n (2.4GHz only). **Compatible Security Protocols:** WEP, WPA/WPA2, EAP-PAEP Hand tolerance: Minute hand: +/- 1/4 minute Second hand: +/- 1/2 second Temperature range: Operating: 14°F - 122°F (-10°C - 50°C) Shelf: -4°F - 131°F (-20°C - 55°C) Compliance: UL, cUL listed. FCC part 15 Section 15

Synchronized Clock Systems



#### **Ordering Information:**

SAW Series Wi-Fi Square Clock: SAW-4XS-XXS-X-XX

·	1	ĺ				
	Color: B: Black W: White C: Custom	Size: 09: 9" 12: 12"	Voltage: 0: Battery 1: 24V/110V 2: 24V/230V	Dial: A-G: Specialty M: 24 Hour Y: Custom Face Z: Custom Logo	Hands: 1-3: Specialty	
Double Mount Pole: SAB-1BD-XXS-0						
	00: Stand	Pole Size: 00: Standard 01: Short (ceiling onl		*Standard length black poles will always be metal (SAB-1BD-00S-0) *Short length black poles will always be ABS (SAB-1BD-01S-0) *Standard length white poles will always be ABS (SAB-4WD-00S-0)		

Note: Purchasing double mounted round analog clocks will require two clocks using the clock part number and one double mount housing using the part number above.

Examples:


SAW-4WS-09S-0: Sapling Analog, Wi-Fi, 9" Square, Battery-Operated, Surface Wall Mount, White Case with Metallic Gray Rim SAW-4BS-12S-1: Sapling Analog, Wi-Fi, 12" Square, 110VAC, Surface Wall Mount, Mineral Black Case with Metallic Gray Rim

Specification sheets may change without prior notice

synchronized Clock Systems

# SAW Series Wi-Fi Square Clock (V2.7)

## **Sapling Square Analog Clock Dimensions**

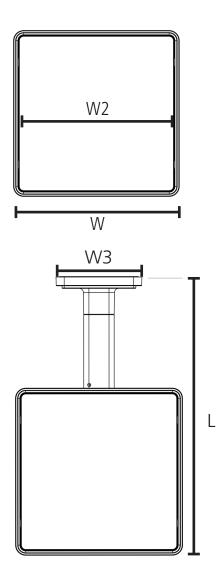

	9″ Square	12" Square		
Clock Size:		W = 12.76" (32.4cm) W2 = 11.94" (30.3cm) D = 2.44" (6.2cm) D2 = 1.34" (3.4cm)		
Shipping Weight:	3.0lbs (1.81kg)	4.0lbs (1.81kg)		
Double/Dual Mount Dimensions:	W3 = 6.56" (16.7cm) D3 = 4.93" (12.5cm)	W3 = 6.56" (16.7cm) D3 = 4.93" (12.5cm)		
Adjustable Pole Height for standard pole*:	L3 = 18.32" (46.5cm)	L = 21.12" (53.6cm) L = 19.35" (49.1cm)		
Shortened Pole Height:	L = 12.38" (31.4cm)	L = 15.50" (39.3cm)		



**\*Standard** pole refers to part number SAH-1BD-00S-0

**\*\*Shortened** pole (ceiling mount only) refers to part number SAH-1BD-01S-0

🔅 sapling Synchronized Clock Systems SAW Series Wi-Fi Square Clock (V2.7) **Hand & Dial Options** Standard Hands Specialty Hands 1 Specialty Hands 2 Specialty Hands 3 9 -21 15 — С Standard Dial Dial A Dial B Dial M (Military 24 Hours) XII фяк. \_\_\_\_\_\_ Dia<sup>1</sup> С anlin IΛ Dial D Dial E Dial F Specialty Hands 1-3 & Specialty Your Logo Here Dials A-Z are offered at an additonal cost. For more information please contact your Sapling Representative.

 Dial G
 Dial Z

 The Sapling Company, Inc. • 670 Louis Drive Warminster, PA 18974 USA • P: (+1) 215.322.6063 • F: (+1) 215.322.8498 • W: www.sapling-inc.com